

Fixings **25**

Cable tie wall plug (Page 452-455)

Nail mount (Page 456-457)

Trunking plug (Page 458-459)






Fixings **25**

For fixing of cables and conduits in all types of installations

- Combined use with Cable ties 22 in indoor and outdoor installations.
- Two plug sizes available: ø 6 and ø 8.
- Good outdoor performance and resistance to corrosion.

Raw material



Quality marks



Conformity declaration



Wall plug ►

■ Black

□ Grey RAL 7035


See updated information of each part number on www.unex.net



Plug for cables and conduits

Application

Outdoor installations

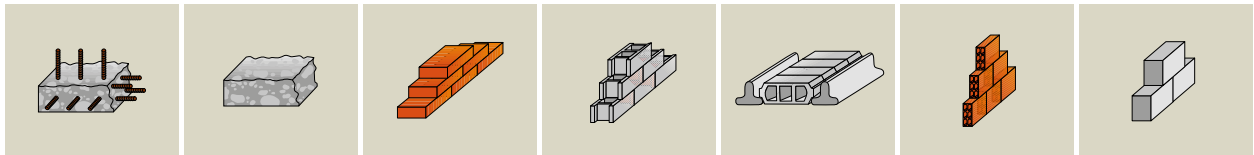

Facades



Coaxial cable CATV



Corrugated conduit



Air conditioning pipes


Easy mounting




For hard and soft walls



No screws needed

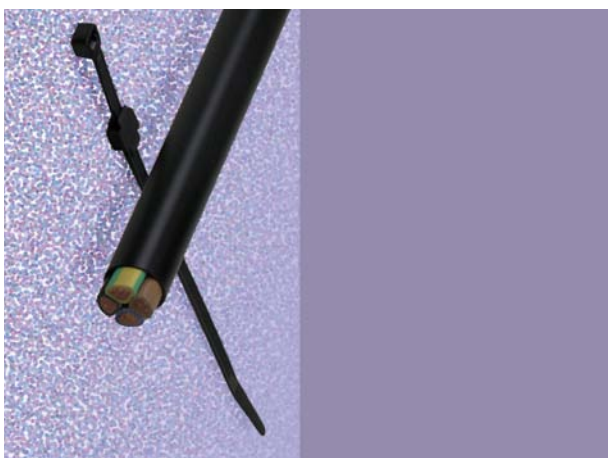

Only two pieces for each fixing

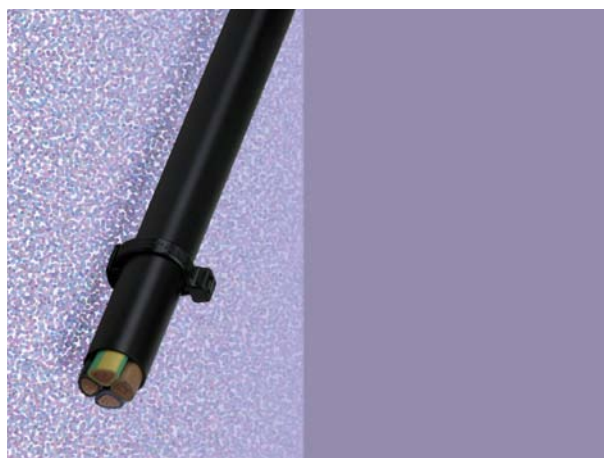

One size of cable ties for several cable or conduit diameters


Compatible with Cable ties **22**

The plugs are compatible with cable ties width 3,6 m, 4,8 mm and 7,6 mm.

Nail mount **25**





Complete solution for fixing of cables and conduits in installations

- Compatible with the most common pneumatic nailguns.
- Easy mounting:
 - Firm fixing to the nailer's nozzle.
 - Possibility to flange from both sides.
- Compatible with Cable ties 22.




Raw material

U63X Nail mount | Compliant 



Application

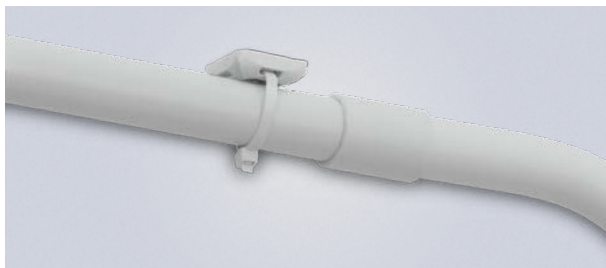

Quality marks



Conformity declaration





Nail mount 

 Black

 Grey RAL 7035

See updated information of each part number on www.unex.net

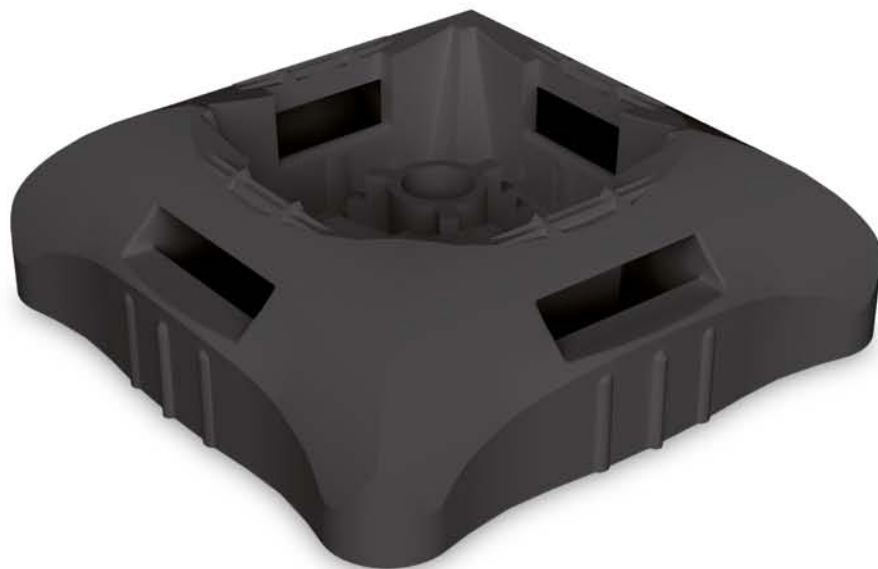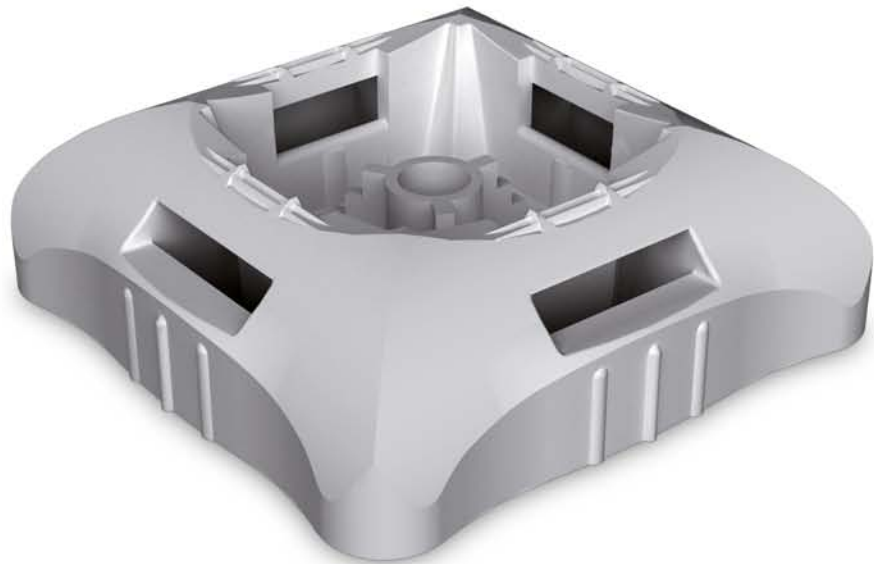


Trunking plug 25

For fixing of Unex trunkings and modular boxes

- For indoor installations.
- Easy to mount and remove.
- Applicable to the most usual types of wall.
- Assures electrical safety.

Raw material

U63X Trunking plug | Compliant 



Electrical safety

The installation is protected against electrical contacts



The plug covers completely the head of the metallic screw.

Packaging



Reusable flap, acting as a toolbox. Facilitates access to the product.

Quality marks



Conformity declaration



Trunking plug ►

■ Black

See updated information of each part number on www.unex.net



Fixings 25 in **U63X**

Fixings 25			ø 4 mm	ø 6 mm	ø 8 mm
		Black <input checked="" type="checkbox"/>			
		Grey RAL 7035 <input type="checkbox"/>			
1		Cable tie wall plug (surface)			1250 (1)
2		Cable tie wall plug (flush)		1253 (2)	1251 (1)
				1253-3 (2)	1251-3 (1)
3		Cable tie surface mount		1252 (3)	
4		Trunking plug	25104 (4)	25106 (4)	

- (1) Soft walls: Drill bit Ø 7.
- (2) Hard walls: Drill bit Ø 8.
- (3) To bolt on M6 or W 1/4 bolt.
- (4) For indoor installations.

5		Nail mount		25501	
				25501-3 (5)	

- (5) For indoor installations.

Sizes (mm)

1. Cable tie wall plug (surface)		Part no.	Recommended Cable ties		Pack
			Ext.	Int.	pc.
		1250	2244-0 2247-0 2249-0 2271-0 2272-0 2273-0	2244 2247 2249 2271 2272 2273	1.000
		Colour: Black Material: U63X			
Note: Soft walls: Drill bit Ø 7. Hard walls: Drill bit Ø 8. It is recommended to keep the bag closed until use.					

2. Cable tie wall plug (flush)		Part no.	Sizes	ø	Recommended Cable ties		Pack
			mm	mm			
Colours			A	broca	Ext.	Int.	pc.
Black	Grey RAL 7035						
1251	1251-3	35	8	2233-0 2235-0 2237-0 2244-0 2247-0 2249-0 2271-0 2272-0 2273-0	2233 2235 2237 2244-3 2247-3 2249 2271 2272 2273	2233-3 2247-3	1.000
1253	1253-3	30	6	2233-0 2235-0 2237-0 2244-0 2247-0 2249-0 2271-0 2272-0 2273-0	2233 2235 2237 2244-3 2247-3 2249 2271 2272 2273	2233-3 2244-3 2247-3	1.000
		Material: U63X		Note: Soft walls: Drill bit Ø 7 to part no. 1251 - 1251-3 and drill bit Ø 5 to part no. 1253 - 1253-3. Hard walls: Drill bit Ø 8 to part no. 1251 - 1251-3 and drill bit Ø 6 to part no. 1253 - 1253-3. It is recommended to keep the bag closed until use.			

3. Cable tie surface mount		Part no.	Recommended Cable ties		Pack
			Ext.	Int.	pc.
		1252	2244-0 2247-0 2249-0 2271-0 2272-0 2273-0	2244 2247 2249 2271 2272 2273	1.000
		Colour: Black Material: U63X			
Note: To bolt on M6 or W 1/4 bolt.					

4. Trunking plug		Part no.	Sizes		Diameter	Application	Pack
			mm	mm	mm	to	pc.
			A	B	plug		
		25104	21	3	4	Mini trunking 78 Skirting board duct 80	1.000
		25106	35	5	6		Modular boxes 85 Trunking 30/73/93
		Colour: Black Material: U63X		Note: Drill bit Ø 6 mm for part no. 25106. Drill bit Ø 4 mm for part no. 25104.			
		For indoor use.					

