

Trunking **07** in **U23X**

Trunking **07** in **U23X**

For machinery supply

Raw material

Ref. **U23X** Trunking | Compliant 


Safety

Electrical




- Insulating material
- No earthing required

Mechanical




- IK04

Service temperature



Protection degree



- IP3X
- Removable without the aid of a tool

In front of fire



- Glow-wire test **960°C**
- Non-flame propagator
- Reaction to fire, Class **M1** acc/ UNE 23727

Quality marks



Approvals



Bureau Veritas



Germanischer Lloyd



Canadian Standards Association

Conformity declaration




* BS EN 50085-1 is the UK implementation of EN 50085-1.
BS EN 50085-2-1 is the UK implementation of EN 50085-2-1.

Trunking 07 ►






Length: 2 m






■ Grey RAL 7030

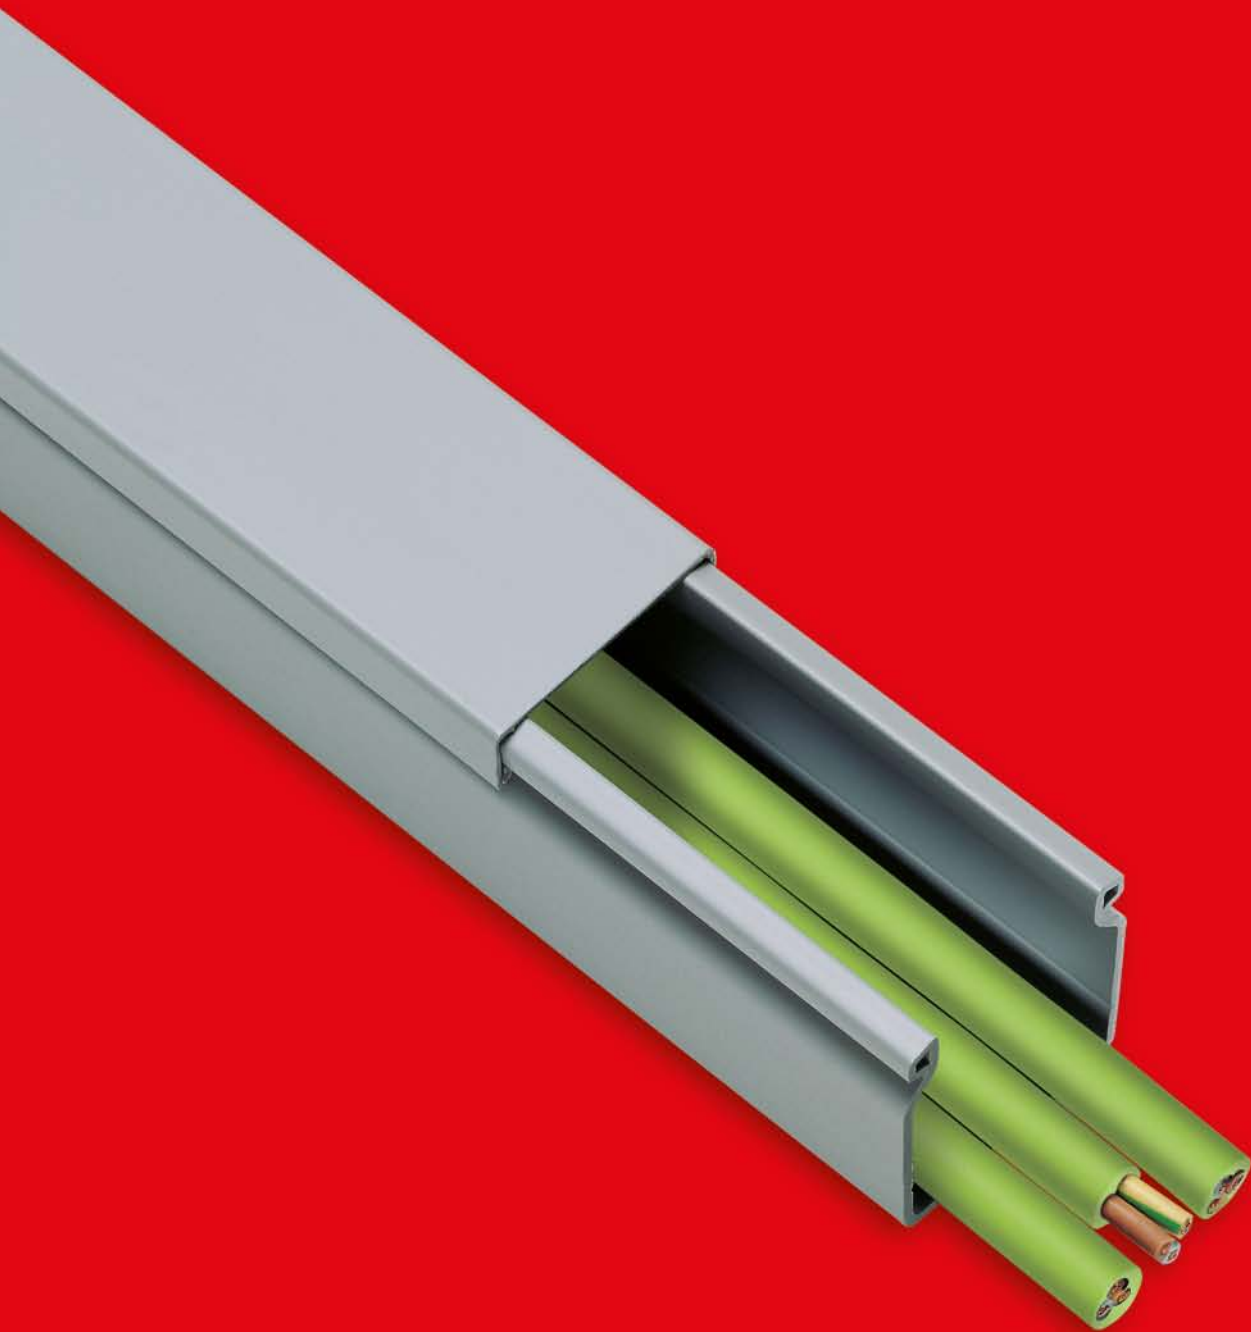




See updated information of each part number on www.unex.net





Trunking 07 in U23X

Trunking 07		Trunking sizes (mm)	25x20	33x30	42x30	42x43
Grey RAL 7030 <input type="checkbox"/>						
1		Trunking 2 m	25.20.07	30.30.07	40.30.07	40.40.07

Trunking 07		Trunking sizes (mm)	42x60	60x60	60x80	60x100
Grey RAL 7030 <input type="checkbox"/>						
1		Trunking 2 m	40.60.07	60.60.07	60.80.07	60.100.07

Trunking 07		Trunking sizes (mm)	60x120	80x60	80x80	80x120
Grey RAL 7030 <input type="checkbox"/>						
1		Trunking 2 m	60.120.07	80.60.07	80.80.07	80.120.07

Sizes (mm)







1. Trunking	Part no.	Sizes mm		Pack
		A	B	m
 	25.20.07	25	20	60
	30.30.07	33	30	60
	40.30.07	42	30	48
	40.40.07	42	43	32
	40.60.07	42	60	24
	60.60.07	60	60	32
	60.80.07	60	80	32
	60.100.07	60	100	12
	60.120.07	60	120	12
	80.60.07	80	60	24
	80.80.07	80	80	24
	80.120.07	80	120	12




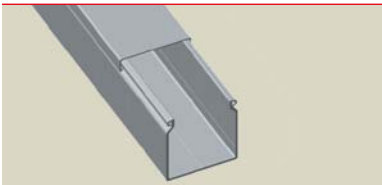

Colour: Grey RAL 7030 Material: U23X





Note: Non-perforated base.

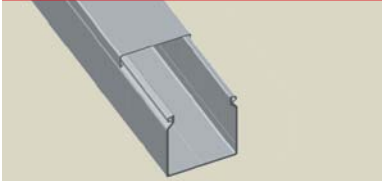

Useful cross-sections (mm²)

Sizes (mm)	25x20	33x30	42x30	42x43	42x60
Part numbers	25.20.07	30.30.07	40.30.07	40.40.07	40.60.07
	 322	 728	 940	 1460	 2112

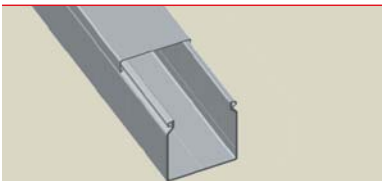Sizes (mm)	60x60	60x80	60x100	60x120
Part numbers	60.60.07	60.80.07	60.100.07	60.120.07
	 3092	 4225	 5362	 6380

Sizes (mm)	80x60	80x80	80x120
Part numbers	80.60.07	80.80.07	80.120.07
	 4128	 5630	 8572